



# Laminate

## PRIME L004

### FEATURES & BENEFITS


- Quality certified by professional lab inspection
- Stain/Wear resistant – AC4 rating
- Resistant to spills and indentation
- Easy to install and maintain



1253 - Silverford



1254 - Castlemoor

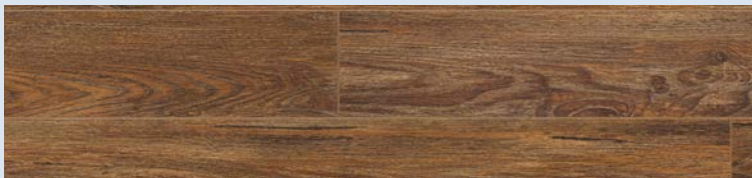


1255 - Fairglass



1250 - Brightwyn



1251 - Foxdell

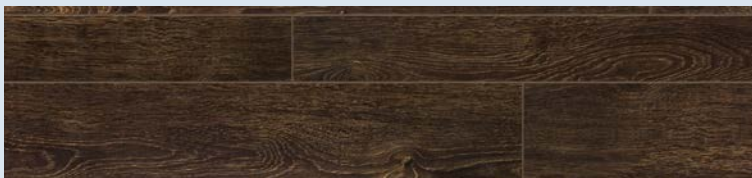

1252 - Woodcliff



### SPECIFICATIONS

#### Finish

Registered Embossed & Handscraped  
Matte Registered Embossed

#### Abrasion Resistance

AC4 class 32 / General commercial use

#### Formaldehyde Content

E1 - CARB II Compliant and FloorScore Certified

#### Multiple Widths

3.543" (90 mm)  
5.630" (143 mm)  
7.717" (196 mm)

#### Total Thickness

0.484" (12.3 mm)

#### Fixed Length

47.835" (1215 mm)

#### Edge Description

V-Joint / Välinge 2G: Drop Lock  
4-Sided Micro Bevel



FSC Certified



CC Compliant



### WARRANTY

#### RESIDENTIAL

Wear - Stain - Fade - 25 years

#### COMMERCIAL

General Traffic - 3 years

Moderate Traffic - 7 years

#### MANUFACTURING DEFECTS

25 years

### INSTALLATION

Floating

Suitable over radiant heat

