




Engineered Hardwood


ADORATION W002

FEATURES & BENEFITS


- Lacquered finish for resistance that ensures a long-lasting beautiful flooring!
- Quality-certified by professional lab inspection
- More dimensionally stable than solid hardwood
- Easy to install and maintain

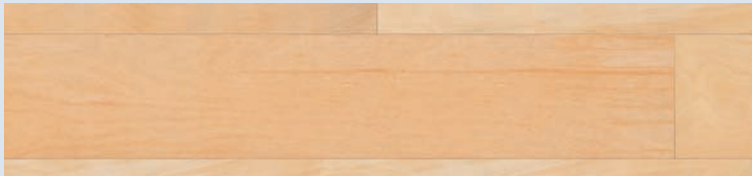


2500 - Purely Natural

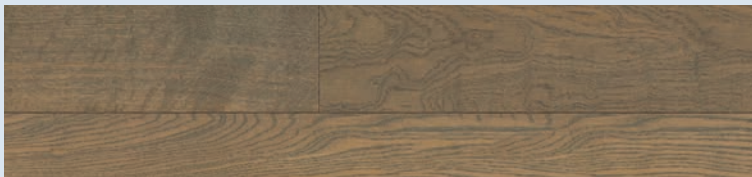


2504 - Weathered

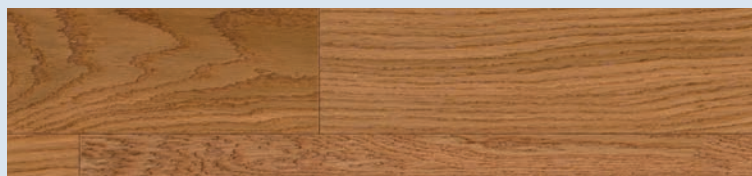


2503 - Caramel Crisp

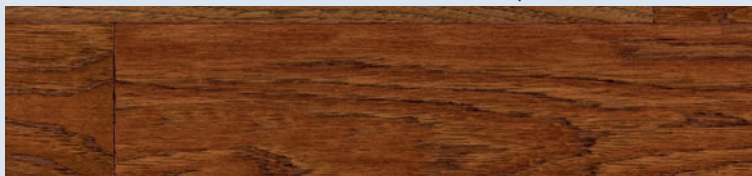

2502 - Aged Mahogany

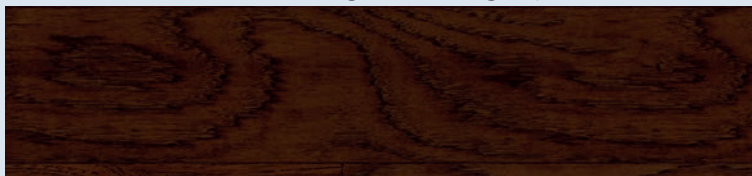

2501 - Deep Smoke

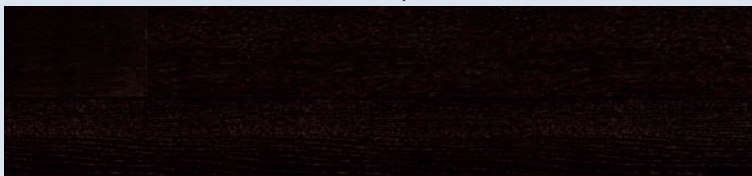

2505 - Midnight



SPECIFICATIONS

Species

European White Oak / Birch / Hickory

Core

HDF 7 mm

Number of Layers

3

Width

5" (127 mm)

Total Thickness

0.315" (8 mm)

Wear Layer Thickness

0.024" (0.6 mm) / Sliced

Lengths

Random

Finish

UV Lacquer

Smooth

Wire-Brushed

Edge Description

V-Joint

4-Sided Micro Bevel

Locking System

Välänge 2G®: Drop Lock



WARRANTY

Structural

15 years limited

Finish

10 years limited

INSTALLATION

Floating

Glue

Suitable over radiant heat





Engineered Hardwood

ADORATION W002 - 2500 PURELY NATURAL

fashion
AT YOUR FEET

FEATURES & BENEFITS

- Lacquered finish for resistance that ensures a long-lasting beautiful flooring!
- Quality-certified by professional lab inspection
- More dimensionally stable than solid hardwood
- Easy to install and maintain

SPECIFICATIONS

Species

Birch

Core

HDF 7 mm

Number of Layers

3

Width

5" (127 mm)

Total Thickness

0.315" (8 mm)

Wear Layer Thickness

0.024" (0.6 mm) / Sliced

Lengths

Random

Finish

UV Lacquer
Smooth

Edge Description

V-Joint
4-Sided Micro Bevel

Locking System

Välinge 2G®: Drop Lock



WARRANTY

Structural

15 years limited

Finish

10 years limited

INSTALLATION

Floating

Glue

Suitable over radiant heat





Engineered Hardwood

ADORATION W002 - 2501 DEEP SMOKE

FEATURES & BENEFITS

- Lacquered finish for resistance that ensures a long-lasting beautiful flooring!
- Quality-certified by professional lab inspection
- More dimensionally stable than solid hardwood
- Easy to install and maintain



fashion
AT YOUR FEET

SPECIFICATIONS

Species

Hickory

Core

HDF 7 mm

Number of Layers

3

Width

5" (127 mm)

Total Thickness

0.315" (8 mm)

Wear Layer Thickness

0.024" (0.6 mm) / Sliced

Lengths

Random

Finish

UV Lacquer

Wire-Brushed

Edge Description

V-Joint

4-Sided Micro Bevel

Locking System

Välinge 2G®: Drop Lock



WARRANTY

Structural

15 years limited

Finish

10 years limited

INSTALLATION

Floating

Glue

Suitable over radiant heat



b. beaulieu®
A M E R I C A



Engineered Hardwood

ADORATION W002 - 2502 AGED MAHOGANY

fashion
AT YOUR FEET

FEATURES & BENEFITS

- Lacquered finish for resistance that ensures a long-lasting beautiful flooring!
- Quality-certified by professional lab inspection
- More dimensionally stable than solid hardwood
- Easy to install and maintain

SPECIFICATIONS

Species

Hickory

Core

HDF 7 mm

Number of Layers

3

Width

5" (127 mm)

Total Thickness

0.315" (8 mm)

Wear Layer Thickness

0.024" (0.6 mm) / Sliced

Lengths

Random

Finish

UV Lacquer

Wire-Brushed

Edge Description

V-Joint

4-Sided Micro Bevel

Locking System

Välinge 2G®: Drop Lock



WARRANTY

Structural

15 years limited

Finish

10 years limited

INSTALLATION

Floating

Glue

Suitable over radiant heat





Engineered Hardwood

ADORATION W002 - 2503 CARAMEL CRISP

FEATURES & BENEFITS

- Lacquered finish for resistance that ensures a long-lasting beautiful flooring!
- Quality-certified by professional lab inspection
- More dimensionally stable than solid hardwood
- Easy to install and maintain



fashion
AT YOUR FEET

SPECIFICATIONS

Species

European Oak

Core

HDF 7 mm

Number of Layers

3

Width

5" (127 mm)

Total Thickness

0.315" (8 mm)

Wear Layer Thickness

0.024" (0.6 mm) / Sliced

Lengths

Random

Finish

UV Lacquer

Wire-Brushed

Edge Description

V-Joint

4-Sided Micro Bevel

Locking System

Välinge 2G®: Drop Lock



WARRANTY

Structural

15 years limited

Finish

10 years limited

INSTALLATION

Floating

Glue

Suitable over radiant heat





Engineered Hardwood

ADORATION W002 - 2504 WEATHERED

FEATURES & BENEFITS

- Lacquered finish for resistance that ensures a long-lasting beautiful flooring!
- Quality-certified by professional lab inspection
- More dimensionally stable than solid hardwood
- Easy to install and maintain



fashion
AT YOUR FEET

SPECIFICATIONS

Species

European Oak

Core

HDF 7 mm

Number of Layers

3

Width

5" (127 mm)

Total Thickness

0.315" (8 mm)

Wear Layer Thickness

0.024" (0.6 mm) / Sliced

Lengths

Random

Finish

UV Lacquer

Wire-Brushed

Edge Description

V-Joint

4-Sided Micro Bevel

Locking System

Välinge 2G®: Drop Lock



WARRANTY

Structural

15 years limited

Finish

10 years limited

INSTALLATION

Floating

Glue

Suitable over radiant heat



b. beaulieu®
A M E R I C A



Engineered Hardwood

ADORATION W002 - 2505 MIDNIGHT

FEATURES & BENEFITS

- Lacquered finish for resistance that ensures a long-lasting beautiful flooring!
- Quality-certified by professional lab inspection
- More dimensionally stable than solid hardwood
- Easy to install and maintain



fashion
AT YOUR FEET

SPECIFICATIONS

Species

European Oak

Core

HDF 7 mm

Number of Layers

3

Width

5" (127 mm)

Total Thickness

0.315" (8 mm)

Wear Layer Thickness

0.024" (0.6 mm) / Sliced

Lengths

Random

Finish

UV Lacquer

Wire-Brushed

Edge Description

V-Joint

4-Sided Micro Bevel

Locking System

Välinge 2G®: Drop Lock



WARRANTY

Structural

15 years limited

Finish

10 years limited

INSTALLATION

Floating

Glue

Suitable over radiant heat

