



Engineered Hardwood

DISTINGUISHED W004

FEATURES & BENEFITS

Stunning modern visuals


- Soft handscrape, brushed and distressed finish
- UV-Cured Oil for a natural appearance and wear resistance
- Quality-certified by professional lab inspection
- Reduced eco footprint
- More dimensionally stable than solid hardwood
- Installs on all floor levels
- Easy to install and maintain




3600 - Clean Approach




3605 - Rivers Edge

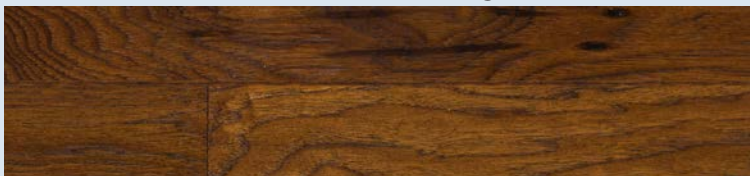


3602 - Hunters Ridge

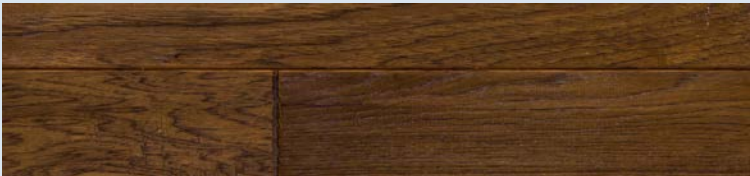

3601 - Warm Heritage

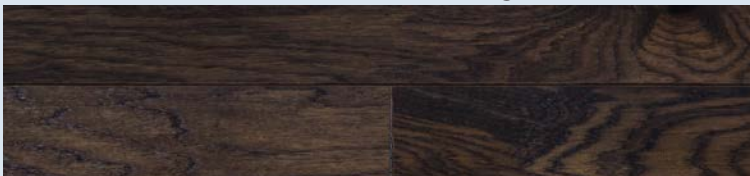

3604 - Clearly Chic

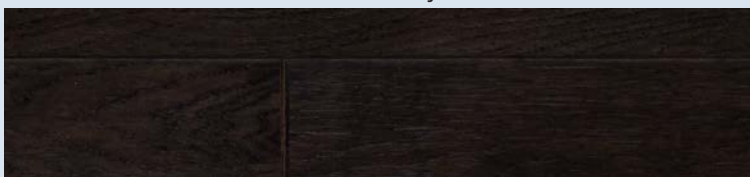

3603 - Midnight Run



SPECIFICATIONS

Species

Hickory

Core

Eucalyptus

Number of layers

8

Width

4.921" (125 mm)

Total Thickness

0.472" (12 mm)

Wear Layer Thickness

0.079" (2 mm) / Sliced

Lengths

Random

Finish

UV-Cured Oil

Soft handscrape, brushed and distressed

Edge Description

V-Joint

4-Sided Micro Bevel

Locking System

Tongue and Groove



WARRANTY

Structural

Lifetime limited

Finish

25 years limited

INSTALLATION

Nail/Staple

Glue

Floating

Suitable over radiant heat





Engineered Hardwood

DISTINGUISHED W004 - 3600 Clean Approach



FEATURES & BENEFITS

Stunning modern visuals

- Soft handscrape, brushed and distressed finish
- UV-Cured Oil for a natural appearance and wear resistance
- Quality-certified by professional lab inspection
- Reduced eco footprint
- More dimensionally stable than solid hardwood
- Installs on all floor levels
- Easy to install and maintain



SPECIFICATIONS

Species

Hickory

Core

Eucalyptus

Number of layers

8

Width

4.921" (125 mm)

Total Thickness

0.472" (12 mm)

Wear Layer Thickness

0.079" (2 mm) / Sliced

Lengths

Random

Finish

UV-Cured Oil

Soft handscrape, brushed and distressed

Edge Description

V-Joint

4-Sided Micro Bevel

Locking System

Tongue and Groove



WARRANTY

Structural

Lifetime limited

Finish

25 years limited

INSTALLATION

Nail/Staple

Glue

Floating

Suitable over radiant heat





Engineered Hardwood

DISTINGUISHED W004 - 3601 WARM HERITAGE



FEATURES & BENEFITS

Stunning modern visuals

- Soft handscrape, brushed and distressed finish
- UV-Cured Oil for a natural appearance and wear resistance
- Quality-certified by professional lab inspection
- Reduced eco footprint
- More dimensionally stable than solid hardwood
- Installs on all floor levels
- Easy to install and maintain



SPECIFICATIONS

Species

Hickory

Core

Eucalyptus

Number of layers

8

Width

4.921" (125 mm)

Total Thickness

0.472" (12 mm)

Wear Layer Thickness

0.079" (2 mm) / Sliced

Lengths

Random

Finish

UV-Cured Oil

Soft handscrape, brushed and distressed

Edge Description

V-Joint

4-Sided Micro Bevel

Locking System

Tongue and Groove



WARRANTY

Structural

Lifetime limited

Finish

25 years limited

INSTALLATION

Nail/Staple

Glue

Floating

Suitable over radiant heat





Engineered Hardwood

DISTINGUISHED W004 - 3602 HUNTERS RIDGE



FEATURES & BENEFITS

Stunning modern visuals

- Soft handscrape, brushed and distressed finish
- UV-Cured Oil for a natural appearance and wear resistance
- Quality-certified by professional lab inspection
- Reduced eco footprint
- More dimensionally stable than solid hardwood
- Installs on all floor levels
- Easy to install and maintain



SPECIFICATIONS

Species

Hickory

Core

Eucalyptus

Number of layers

8

Width

4.921" (125 mm)

Total Thickness

0.472" (12 mm)

Wear Layer Thickness

0.079" (2 mm) / Sliced

Lengths

Random

Finish

UV-Cured Oil

Soft handscrape, brushed and distressed

Edge Description

V-Joint

4-Sided Micro Bevel

Locking System

Tongue and Groove



WARRANTY

Structural

Lifetime limited

Finish

25 years limited

INSTALLATION

Nail/Staple

Glue

Floating

Suitable over radiant heat





Engineered Hardwood

DISTINGUISHED W004 - 3603 MIDNIGHT RUN



FEATURES & BENEFITS

Stunning modern visuals

- Soft handscrape, brushed and distressed finish
- UV-Cured Oil for a natural appearance and wear resistance
- Quality-certified by professional lab inspection
- Reduced eco footprint
- More dimensionally stable than solid hardwood
- Installs on all floor levels
- Easy to install and maintain



SPECIFICATIONS

Species

Hickory

Core

Eucalyptus

Number of layers

8

Width

4.921" (125 mm)

Total Thickness

0.472" (12 mm)

Wear Layer Thickness

0.079" (2 mm) / Sliced

Lengths

Random

Finish

UV-Cured Oil

Soft handscrape, brushed and distressed

Edge Description

V-Joint

4-Sided Micro Bevel

Locking System

Tongue and Groove



WARRANTY

Structural

Lifetime limited

Finish

25 years limited

INSTALLATION

Nail/Staple

Glue

Floating

Suitable over radiant heat





Engineered Hardwood

DISTINGUISHED W004 - 3604 CLEARLY CHIC



FEATURES & BENEFITS

Stunning modern visuals

- Soft handscrape, brushed and distressed finish
- UV-Cured Oil for a natural appearance and wear resistance
- Quality-certified by professional lab inspection
- Reduced eco footprint
- More dimensionally stable than solid hardwood
- Installs on all floor levels
- Easy to install and maintain



SPECIFICATIONS

Species

Hickory

Core

Eucalyptus

Number of layers

8

Width

4.921" (125 mm)

Total Thickness

0.472" (12 mm)

Wear Layer Thickness

0.079" (2 mm) / Sliced

Lengths

Random

Finish

UV-Cured Oil

Soft handscrape, brushed and distressed

Edge Description

V-Joint

4-Sided Micro Bevel

Locking System

Tongue and Groove



WARRANTY

Structural

Lifetime limited

Finish

25 years limited

INSTALLATION

Nail/Staple

Glue

Floating

Suitable over radiant heat





Engineered Hardwood

DISTINGUISHED W004 - 3605 RIVERS EDGE



FEATURES & BENEFITS

Stunning modern visuals

- Soft handscrape, brushed and distressed finish
- UV-Cured Oil for a natural appearance and wear resistance
- Quality-certified by professional lab inspection
- Reduced eco footprint
- More dimensionally stable than solid hardwood
- Installs on all floor levels
- Easy to install and maintain



SPECIFICATIONS

Species

Hickory

Core

Eucalyptus

Number of layers

8

Width

4.921" (125 mm)

Total Thickness

0.472" (12 mm)

Wear Layer Thickness

0.079" (2 mm) / Sliced

Lengths

Random

Finish

UV-Cured Oil

Soft handscrape, brushed and distressed

Edge Description

V-Joint

4-Sided Micro Bevel

Locking System

Tongue and Groove



WARRANTY

Structural

Lifetime limited

Finish

25 years limited

INSTALLATION

Nail/Staple

Glue

Floating

Suitable over radiant heat

